



NOTES:

1. SUB-BASE DEPTH AND PREPARATION IS DEPENDENT ON SITE CONDITIONS PLUS LOADING REQUIREMENTS.
2. TRUEGRID PRO PLUS PRODUCTS ARE SUFFICIENTLY RATED FOR 20.0 T AXLE RANGING FROM SINGLE TYRE TO TRIPLE AXLE DUAL TYRE.
3. GEOGRID MESH OR GEOFABRIC MAY BE REQUIRED BETWEEN SUB-GRADE & SUB-BASE FOR CERTAIN SOILS AND SITE SPECIFIC REQUIREMENTS.
4. INCREASE SUB-BASE DEPTH FOR INCREASED STORM WATER DETENTION.
5. NO STAKING NECESSARY WITH TRUEGRID PRO PLUS WHEN SLOPE IS BELOW 20 DEGREES. ASSESS PROJECT, AS NEEDED.
6. TRUEGRID PRO PLUS IS ADA COMPLIANT WITH PROPER FILL MATERIAL.
7. FINAL ENGINEERED CROSS SECTION AGGREGATES AND DEPTH SHOULD ALLOW FOR EXPECTED INFILTRATION RATES, STORAGE CAPACITIES, OUTLET FLOW RATES, AND OTHER SITE SPECIFIC CONDITIONS AND LOAD REQUIREMENTS.
9. THIS CROSS SECTION IS FOR INFORMATION ONLY.

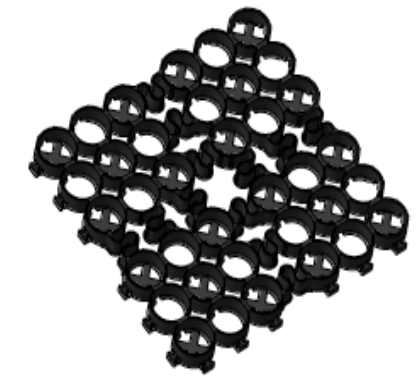

Individual Grid size is 610mm by 610mm
The pieces lock together using Male / Female inbuilt clips.

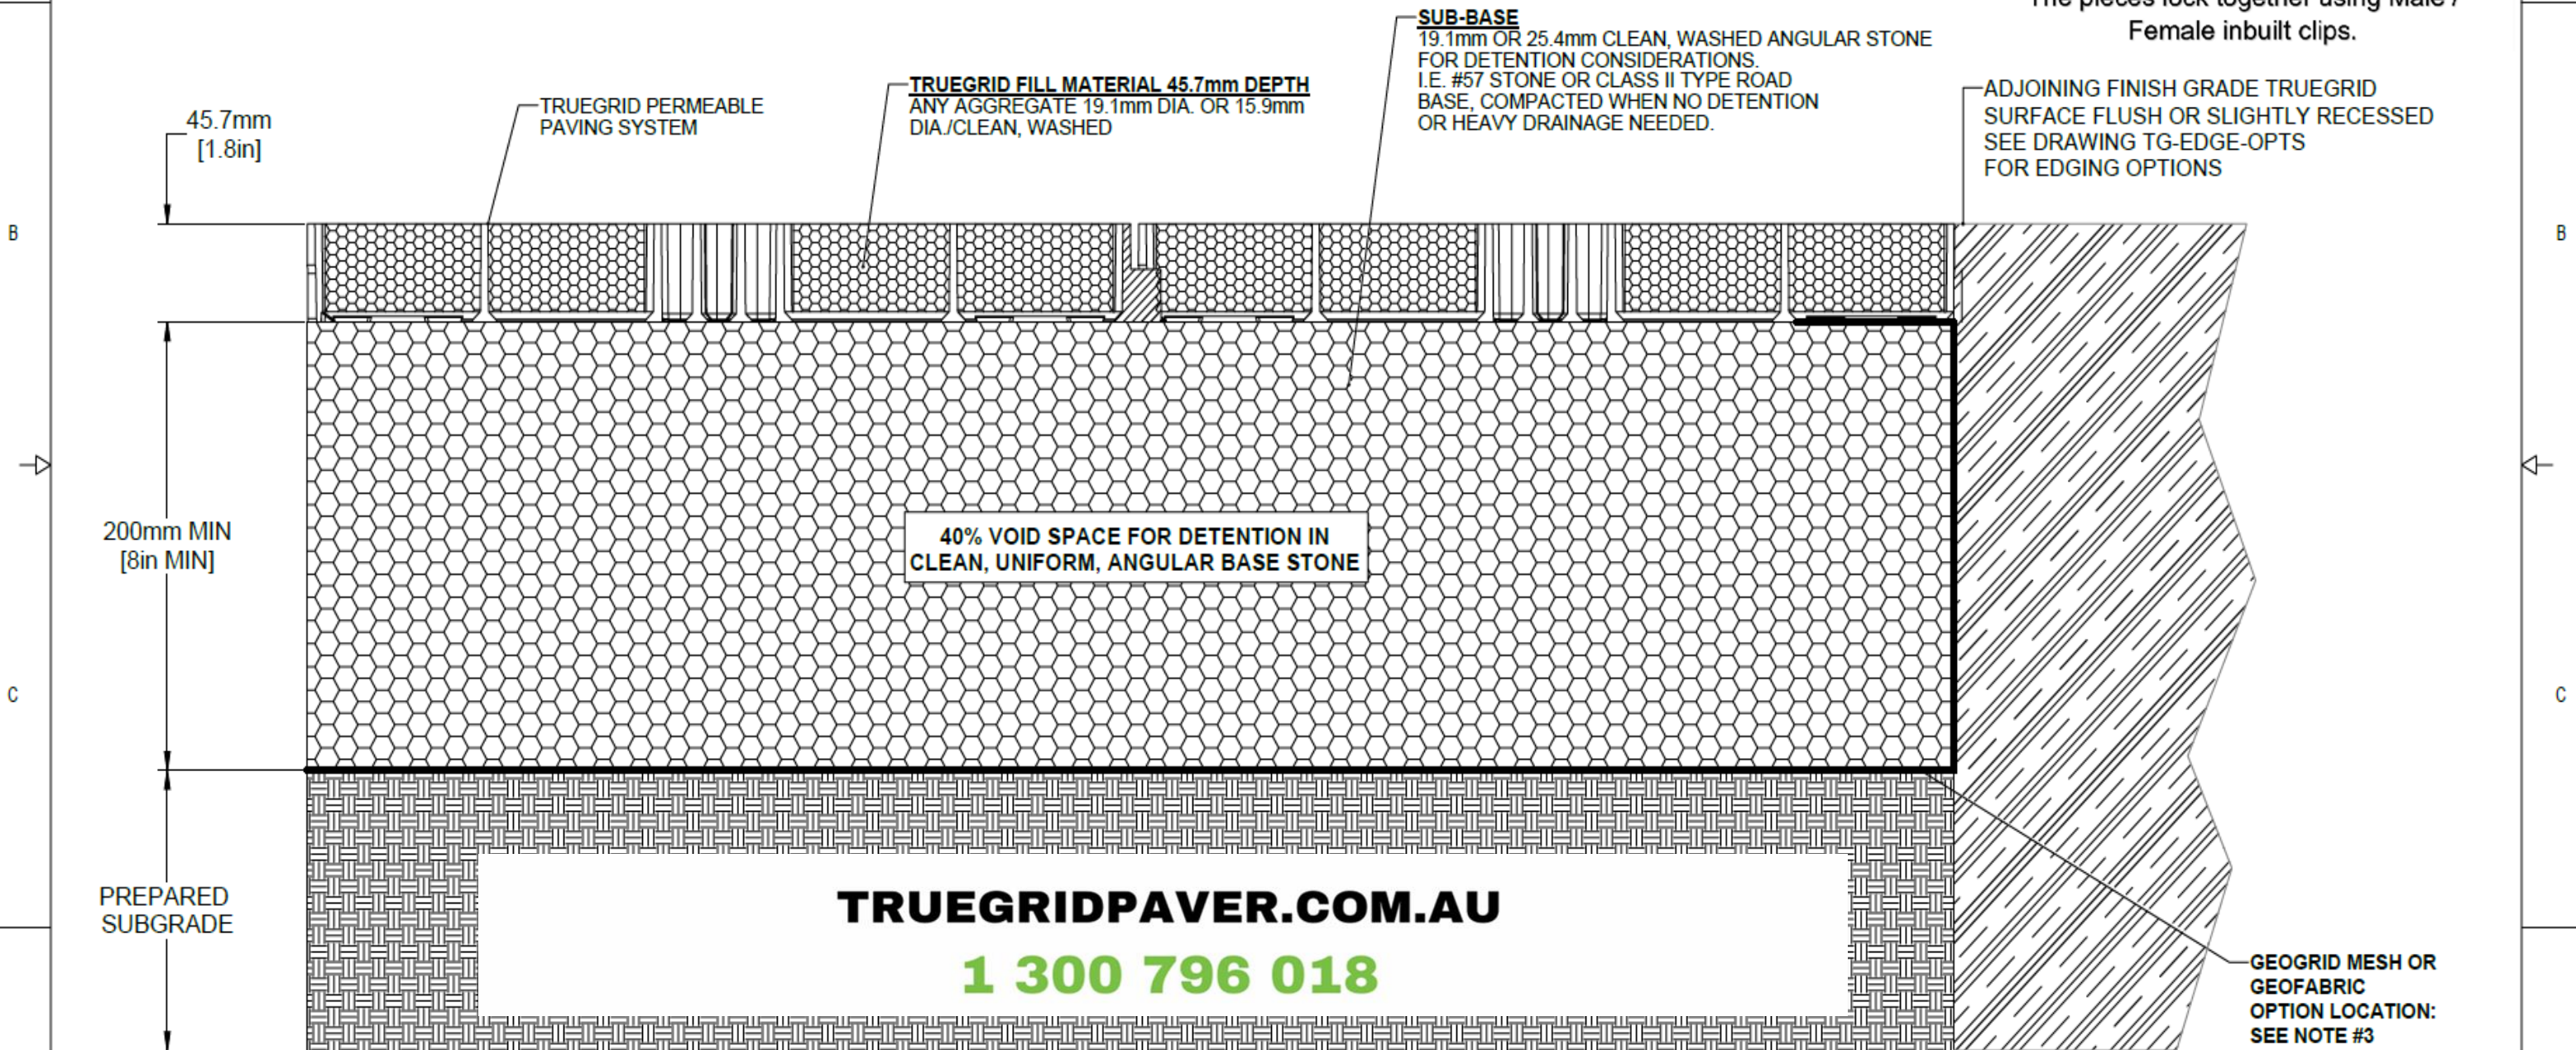

APPLICATION: GRAVEL FILL HEAVY LOAD TRUEGRID PRO PLUS

HEAVY LOAD PARKING LOT, FIRE LANES, EQUIPMENT YARD, SERVICE ROADS.



CLIENT / PROJECT		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		APPROVAL INFORMATION			
PROPRIETARY DESIGN RIGHTS NOTICE: THIS DESIGN WAS ORIGINATED BY AND IS THE EXCLUSIVE PROPERTY OF TRUEGRID. IT IS DISCLOSED IN CONFIDENCE WITH THE UNDERSTANDING THAT NO REPRODUCTION OR OTHER USE OF THE INFORMATION IS AUTHORIZED WITHOUT SPECIFIC AGREEMENT IN WRITING BY TRUEGRID.		DRAWN BY: J. Thethy	DATE: 1/30/2019	APPROVED BY: C. White	DATE: 1/31/2019	TRUEGRID GRAVEL FILL INSTALLATION HEAVY LOAD	
DO NOT SCALE DRAWING							
00 ORIGINAL ISSUE	JT JT CW 01/31/2019	DATE	DATE	DATE	DATE	DATE	DATE
REVISION	DRAWN	CHECKED	APPROVED	DATE	DATE	DATE	DATE
1	2	3	4	5	6	7	8
1	2	3	4	5	6	7	8