



NOTES:

1. SUB-BASE DEPTH AND PREPARATION IS DEPENDENT ON SITE CONDITIONS PLUS LOADING REQUIREMENTS.
2. TRUEGRID PRO PLUS PRODUCTS ARE SUFFICIENTLY RATED FOR 20.0 T AXLE RANGING FROM SINGLE TYRE TO TRIPLE AXLE DUAL TYRE.
3. GEOGRID MESH OR GEOFABRIC MAY BE REQUIRED BETWEEN SUB-GRADE & SUB-BASE FOR CERTAIN SOILS AND SITE SPECIFIC REQUIREMENTS.
4. INCREASE SUB-BASE DEPTH FOR INCREASED STORM WATER DETENTION.
5. NO STAKING NECESSARY WITH TRUEGRID PRO PLUS WHEN SLOPE IS BELOW 20 DEGREES. ASSESS PROJECT, AS NEEDED.
6. TRUEGRID PRO PLUS IS ADA COMPLIANT WITH PROPER FILL MATERIAL.
7. FINAL ENGINEERED CROSS SECTION AGGREGATES AND DEPTH SHOULD ALLOW FOR EXPECTED INFILTRATION RATES, STORAGE CAPACITIES, OUTLET FLOW RATES, AND OTHER SITE SPECIFIC CONDITIONS AND LOAD REQUIREMENTS.
8. THIS CROSS SECTION IS FOR INFORMATION ONLY.

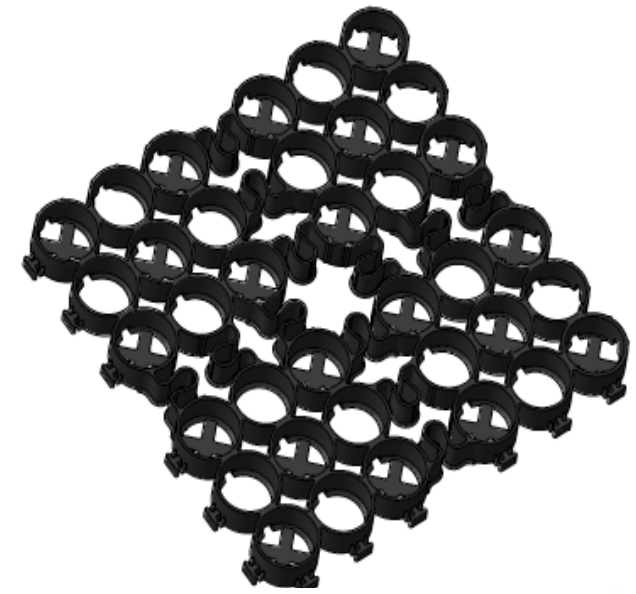

Individual Grid size is 610mm by 610mm
The pieces lock together using Male / Female inbuilt clips.

ADJOINING FINISH GRADE TRUEGRID SURFACE FLUSH OR SLIGHTLY RECESSED SEE DRAWING TG-EDGE-OPTS FOR EDGING OPTIONS

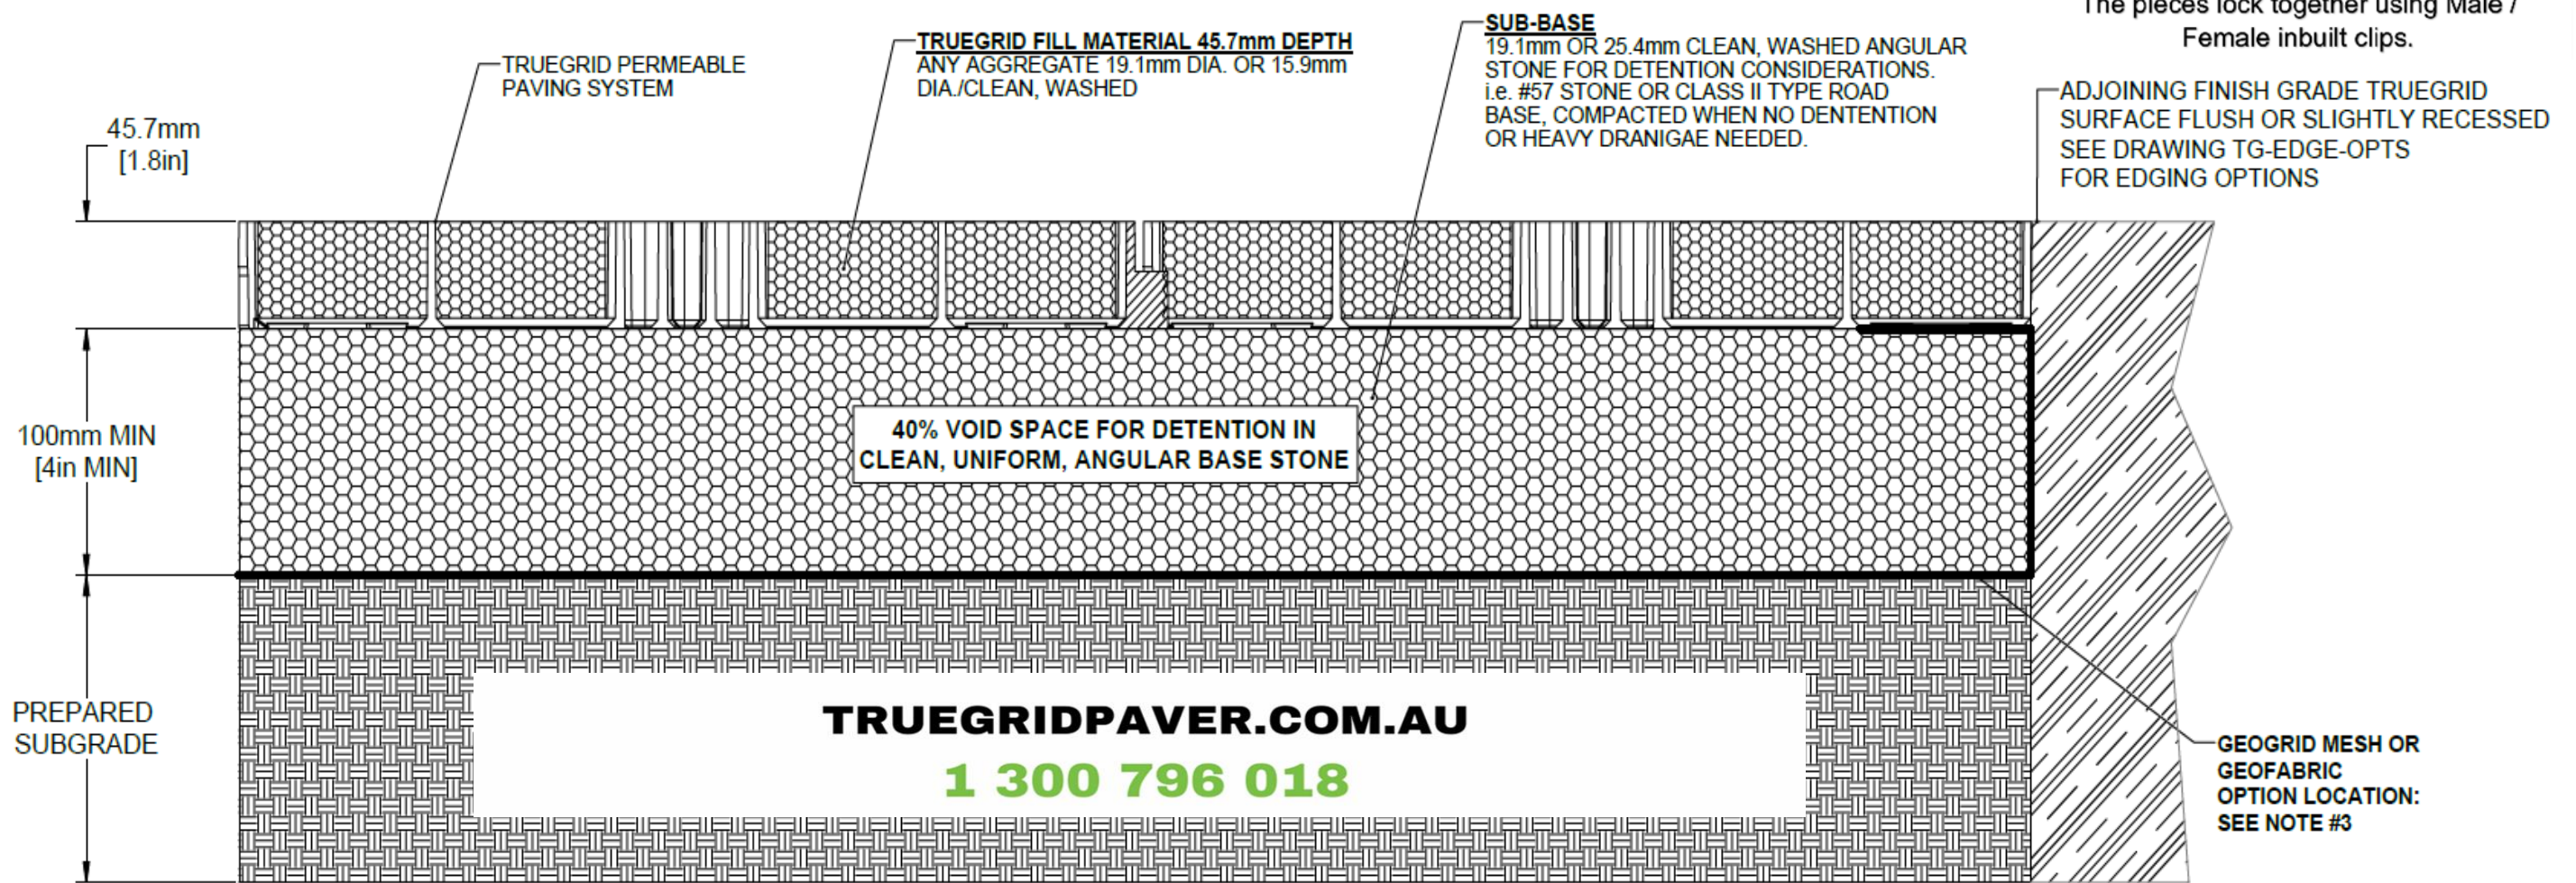

GRAVEL FILL LIGHT LOAD TRUEGRID PRO PLUS

APPLICATION:

PATHWAYS, CART PATHS TRAILS, LIGHT LOAD DRIVEWAYS, EQUINE



CLIENT / PROJECT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES

PROPRIETARY DESIGN RIGHTS NOTICE: THIS DESIGN WAS ORIGINATED BY AND IS THE EXCLUSIVE PROPERTY OF TRUEGRID. IT IS DISCLOSED IN CONFIDENCE WITH THE UNDERSTANDING THAT NO REPRODUCTION OR OTHER USE OF THE INFORMATION IS AUTHORIZED WITHOUT SPECIFIC AGREEMENT IN WRITING BY TRUEGRID.

DO NOT SCALE DRAWING

APPROVAL INFORMATION

DRAWN BY:	DATE:
J. Thethy	2/18/2019
CHECKED BY:	DATE:
J. Thethy	2/18/2019
APPROVED BY:	DATE:
C. White	2/18/2019



TRUEGRID GRAVEL FILL INSTALLATION LIGHT LOAD

00	ORIGINAL ISSUE	JT	JT	CW	02/18/2019
REV		DRAWN	CHECKED	APPROVED	DATE
REVISION					

SIZE	D	DRAWING NUMBER	TG-AU-GRV-LL	REV	00
SCALE	1:1.5	SHEET	1 OF 1		