



NOTES:

1. SUB-BASE DEPTH AND PREPARATION IS DEPENDENT ON SITE CONDITIONS PLUS LOADING REQUIREMENTS.
2. TRUEGRID PRO LITE PRODUCTS ARE SUFFICIENTLY RATED FOR LOW TRAFFIC H-20/HS-20 LOADING.
3. GEOGRID MESH OR GEOFABRIC MAY BE REQUIRED BETWEEN SUB-GRADE & SUB-BASE FOR CERTAIN SOILS AND SITE SPECIFIC REQUIREMENTS.
4. INCREASE SUB-BASE DEPTH FOR INCREASED STORM WATER DETENTION.
5. NO STAKING NECESSARY WITH TRUEGRID PRO LITE WHEN SLOPE IS BELOW 20 DEGREE, ASSESS PROJECT AS NEEDED.
6. TRUEGRID PRO LITE IS ADA COMPLIANT WITH PROPER FILL MATERIAL.
7. FINAL ENGINEERED CROSS SECTION AGGREGATES AND DEPTH SHOULD ALLOW FOR EXPECTED INFILTRATION RATES, STORAGE CAPACITIES, OUTLET FLOW RATES, AND OTHER SITE SPECIFIC CONDITIONS AND LOAD REQUIREMENTS.
8. THIS CROSS SECTION IS FOR INFORMATION ONLY.

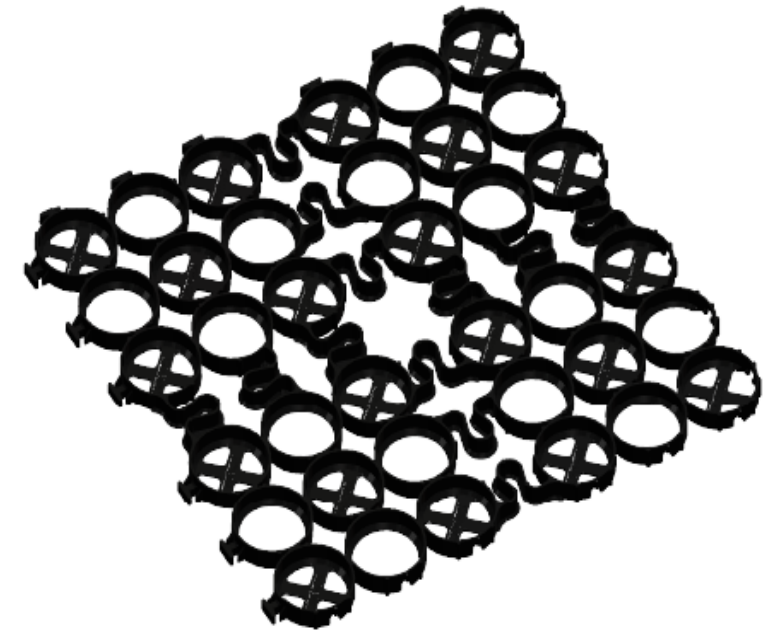

TRUEGRID BLOCK REFERENCE VIEW

Individual Grid size is 610mm by 610mm
The pieces lock together using Male / Female inbuilt clips.

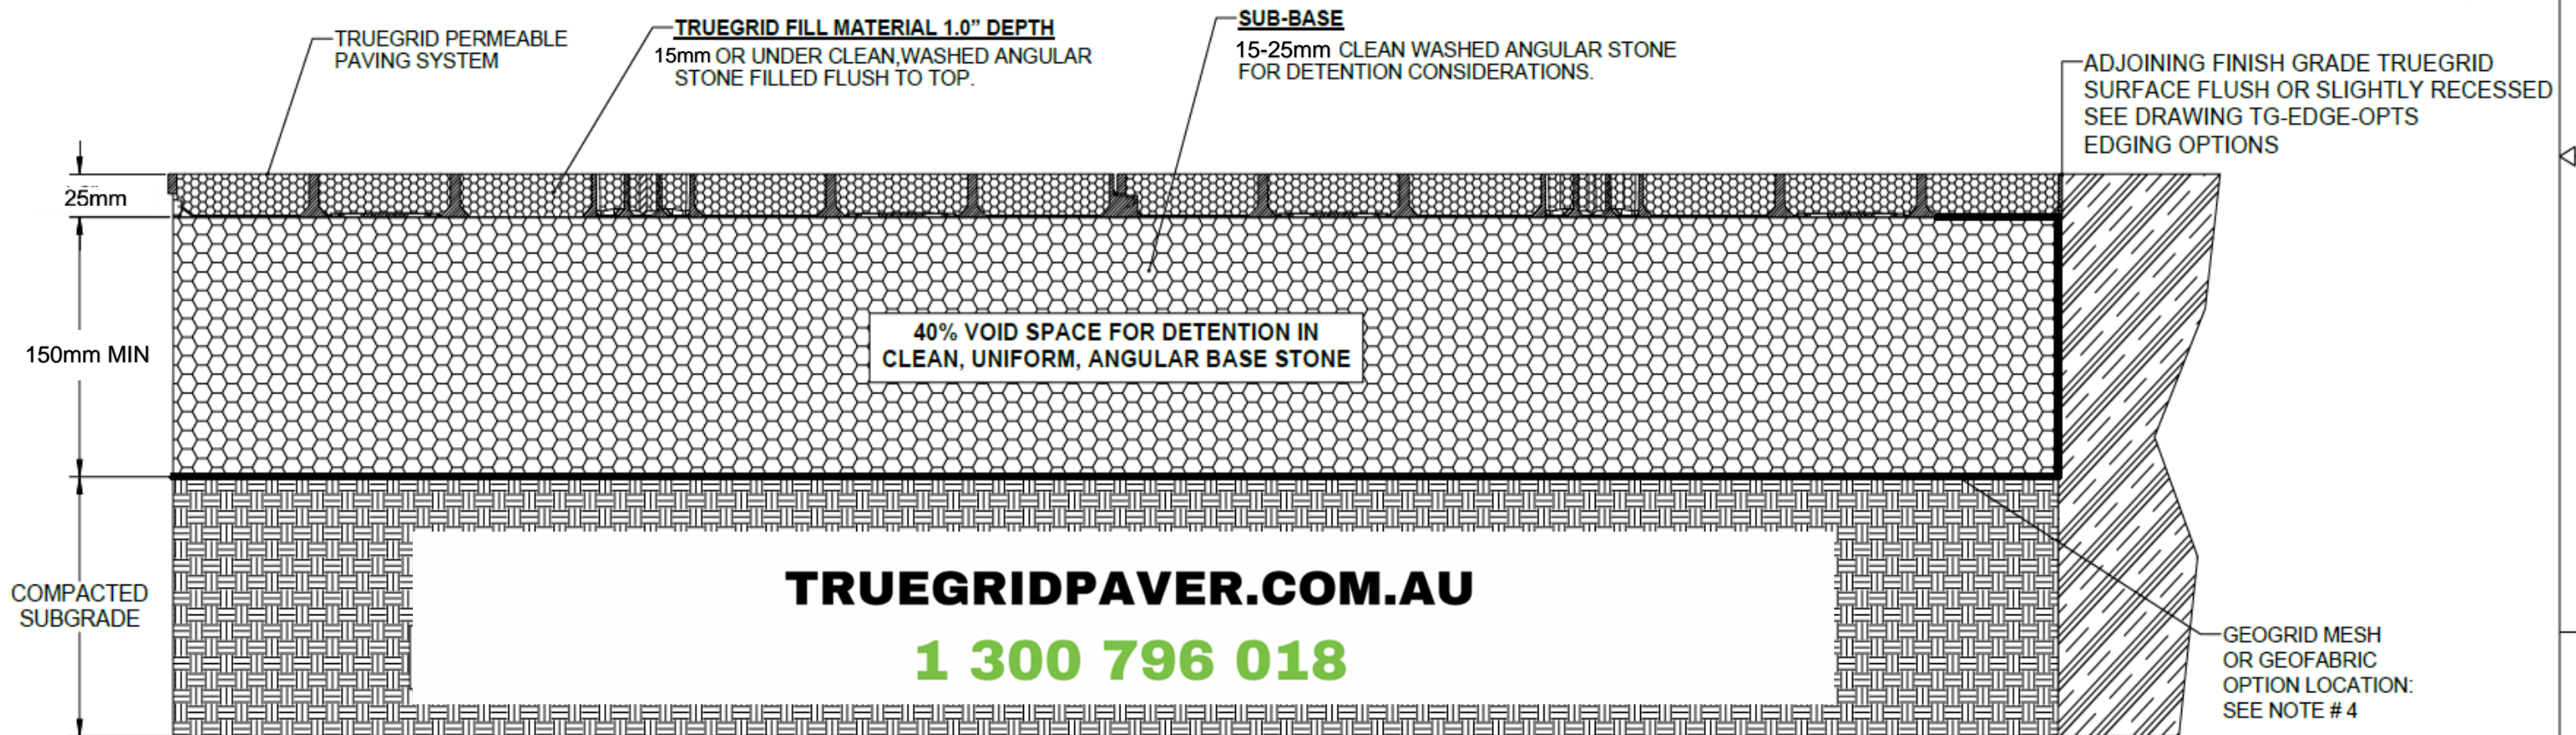

TRUEGRIDPAVER.COM.AU
1 300 796 018

GRAVEL FILL - HEAVY LOAD

APPLICATION EXAMPLES:
DRIVEWAYS
RV PADS
OVERFLOW PARKING



CLIENT / PROJECT
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES
PROPRIETARY DESIGN RIGHTS NOTICE: THIS DESIGN WAS ORIGINATED BY AND IS THE EXCLUSIVE PROPERTY OF TRUEGRID. IT IS DISCLOSED IN CONFIDENCE WITH THE UNDERSTANDING THAT NO REPRODUCTION OR OTHER USE OF THE INFORMATION IS AUTHORIZED WITHOUT SPECIFIC AGREEMENT IN WRITING BY TRUEGRID.
DO NOT SCALE DRAWING

APPROVAL INFORMATION
DRAWN BY: J. Thethy DATE: 9/2/2019
CHECKED BY: J. Thethy DATE: 9/3/2019
APPROVED BY: C. White DATE: 9/3/2019
WEIGHT:

TRUEGRID
True to your project. True to the environment.
TRUEGRID PRO LITE
GRAVEL FILL
HEAVY LOAD
DRAWING NUMBER: TG-LTE-GRV-HL
REV 00

00	ORIGINAL ISSUE	JT	JT	CW	9/3/2019
REV		DRAWN	CHECKED	APPROVED	DATE