


NOTES:

1. SUB-BASE DEPTH AND PREPARATION IS DEPENDENT ON SITE CONDITIONS PLUS LOADING REQUIREMENTS.
2. FILTER FABRIC MAY BE USED BELOW TRUEGRID FOR WEED CONTROL
3. NO STAKING NECESSARY WITH TRUEGRID PRO LITE WHEN SLOPE IS BELOW 20 DEGREE, ASSESS PROJECT AS NEEDED.
4. TRUEGRID PRO LITE IS ADA COMPLIANT WITH PROPER FILL MATERIAL.
5. FINAL ENGINEERED CROSS SECTION AGGREGATES AND DEPTH SHOULD ALLOW FOR EXPECTED INFILTRATION RATES, STORAGE CAPACITIES, OUTLET FLOW RATES, AND OTHER SITE SPECIFIC CONDITIONS AND LOAD REQUIREMENTS.
6. THIS CROSS SECTION IS FOR INFORMATION ONLY.



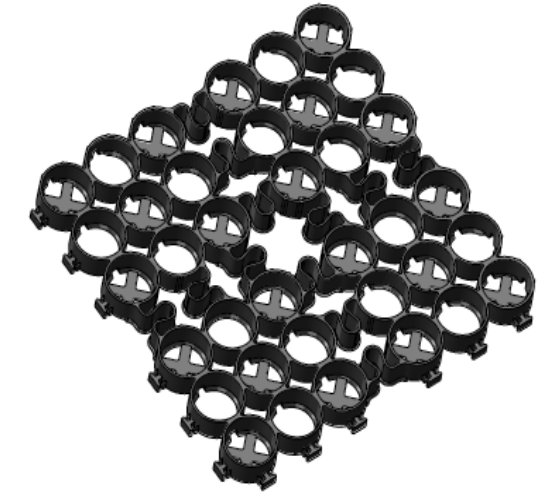

TRUEGRID BLOCK REFERENCE VIEW



GRAVEL FILL - LIGHT LOAD

Application examples:
 PEDESTRIAN / RESIDENTIAL PATHWAYS
 EROSION CONTROL
 SWALE STABILIZATION
 SLOPE STABILIZATION



CLIENT / PROJECT		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		APPROVAL INFORMATION		 True to your project. True to the environment.	
PROPRIETARY DESIGN RIGHTS NOTICE: THIS DESIGN WAS ORIGINATED BY AND IS THE EXCLUSIVE PROPERTY OF TRUEGRID. IT IS DISCLOSED IN CONFIDENCE WITH THE UNDERSTANDING THAT NO REPRODUCTION OR OTHER USE OF THE INFORMATION IS AUTHORIZED WITHOUT SPECIFIC AGREEMENT IN WRITING BY TRUEGRID.		DRAWN BY: J. Thefty	DATE: 9/2/2019	TRUEGRID PRO LITE		REV 00	
DO NOT SCALE DRAWING		CHECKED BY: J. Thefty	DATE: 9/3/2019	GRAVEL FILL- LIGHT LOAD		DRAWING NUMBER: TG-LTE-GRV-LL	
		APPROVED BY: C. White	DATE: 9/3/2019	SCALE: 1:2	SHEET 1 OF 1		

00	ORIGINAL ISSUE	JT	NW	CW	9/3/2019
REV		DRAWN	CHECKED	APPROVED	DATE
REVISION					