


NOTES:

1. TRUEGRID PRO PLUS PRODUCTS DESIGNED FOR LOAD CAPACITIES OF 120,000 LBS PER SQ. FT. TRUEGRID PRODUCTS STRENGTHEN WITH FILL MATERIAL.
2. TRUEGRID PRO PLUS PRODUCTS ARE SUFFICIENTLY RATED FOR H-20 /HS-20 LOADING AND GREATER.
3. NO STAKING NECESSARY WITH TRUEGRID PRO PLUS WHEN SLOPE IS BELOW 10 DEGREES. ASSESS PROJECT, AS NEEDED.
4. FINAL ENGINEERED CROSS SECTION AGGREGATES AND DEPTH SHOULD ALLOW FOR EXPECTED INFILTRATION RATES, STORAGE CAPACITIES, OUTLET FLOW RATES, AND OTHER SITE SPECIFIC CONDITIONS AND LOAD REQUIREMENTS.
5. THIS CROSS SECTION INFORMATION ONLY.



Individual Grid size is 610mm by 610mm
The pieces lock together using Male / Female inbuilt clips.

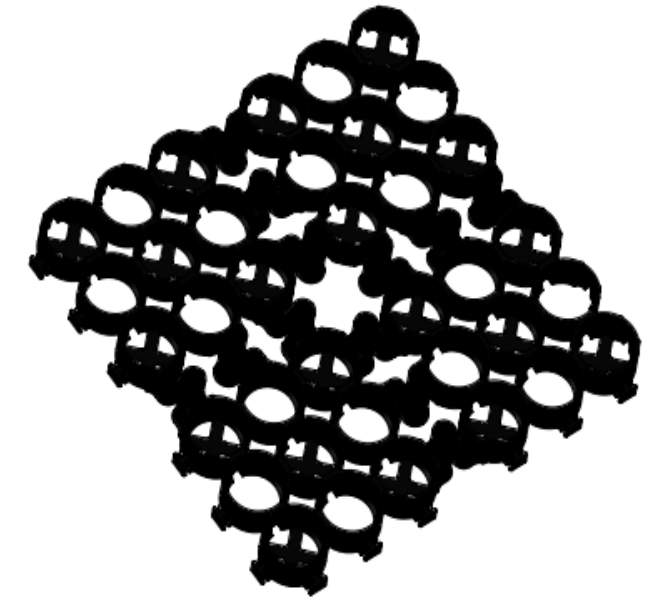

GRAVEL FILL TRUEGRID PRO PLUS

APPLICATION:

EROSION CONTROL, SLOPE CONTROL, SWALES



CLIENT / PROJECT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
PROPRIETARY DESIGN RIGHTS NOTICE:
THIS DESIGN WAS ORIGINATED BY AND IS
THE EXCLUSIVE PROPERTY OF TRUEGRID.
IT IS DISCLOSED IN CONFIDENCE
WITH THE UNDERSTANDING THAT NO
REPRODUCTION OR OTHER USE OF THE
INFORMATION IS AUTHORIZED WITHOUT
SPECIFIC AGREEMENT IN WRITING BY
TRUEGRID.

DO NOT SCALE
DRAWING

APPROVAL INFORMATION

DRAWN BY:	DATE:
J. Thehly	6/1/2015
CHECKED BY:	DATE:
J. Thehly	6/2/2015
APPROVED BY:	DATE:
C. White	6/2/2015



TRUEGRID GRAVEL
FILL INSTALLATION
EROSION CONTROL

REV	DESCRIPTION	DRAWN	CHECKED	APPROVED	DATE
04	UPDATED TRUEGRID STANDARDS	JT	JT	CW	9/20/2017

SIZE	D	DRAWING NUMBER:	TG-GRV	REV	04
WEIGHT:	SCALE	1:1.5	SHEET	1 OF 1	